
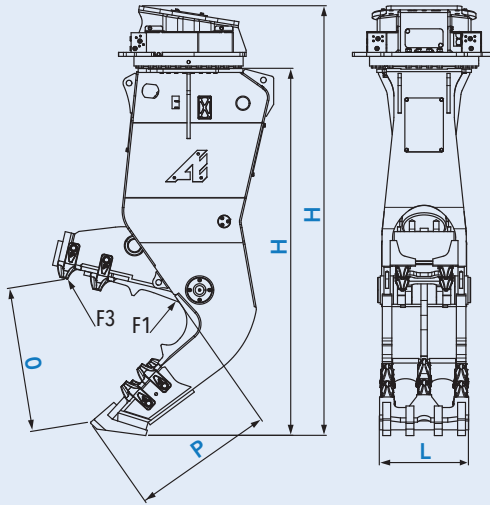
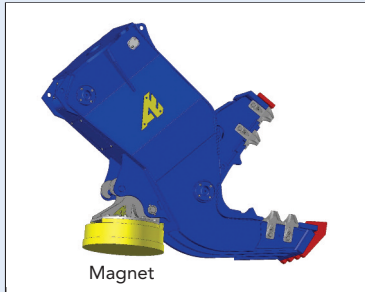


- 1 Bolt on top plate.
- 2 2 versions:
 - Without rotation.
 - Continuous 360° twin motors hydraulic rotation.
- 3 Reversed cylinder, protected rod.
- 4 3 jaws configurations according the pulverizing to be done or the material:
 - Open jaws.
 - Half-closed jaws.
 - Closed jaws.
- 5 Wearing parts in 550 and 600HB steel.
- 6 Jaws noses fully protected.

Options:

- Rebar cutter with reversible blades.
- Speed valve.
- Magnet on BBH020.

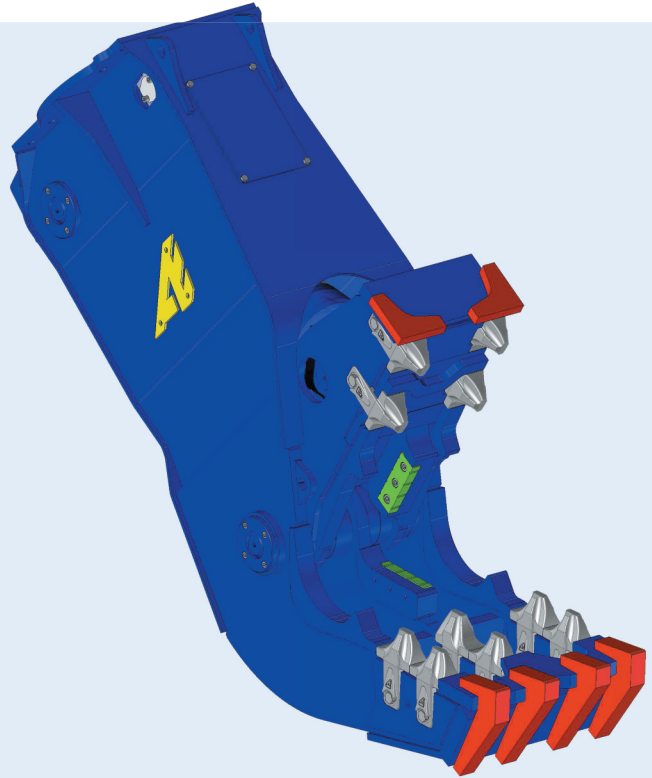

Model		H	O	P	L	F1	F3			Full cycle*				
		mm	mm	mm	mm	t	t						mm	bar
BBH 014 B	1 433	1 974												
BBH 014 R (Rotating)	1 727	2 331	646	735	470	300	74	30	380 maxi	200 maxi	3,4/5	-	-	13/19
BBH 020 B	2 100	2 328												
BBH 020 R (Rotating)	2 320	2 725	919	901	565	400	96	40	380 maxi	250 maxi	4,1/6,3	140	18/28	19/32
Option magnet 2,6Kw														
BBH 031 B	3 226	2 671												
BBH 031 R (Rotating)	3 817	3 065	1 031	1 028	670	500	127	60	380 maxi	400 maxi	3,5/5,5	140	28/40	29/39
BBH 1300 B	5 160	3 463												
BBH 1300 R (Rotating)	6 900	4 300	1 250	1 083	835	520	150	60	350	450 to 600	8,5 to 6**	140	40/60	55/80

*Cycle with/without speed valve.
 ** Without speed valve.
 Weight (±3%) with bolt on top plate.